# PRODUCT SUBMITTAL SHEET

**Product Type:** Structural Track

**Product Definition:** 1200T162-43 (50ksi)

**CSI Code:** 05 41 00

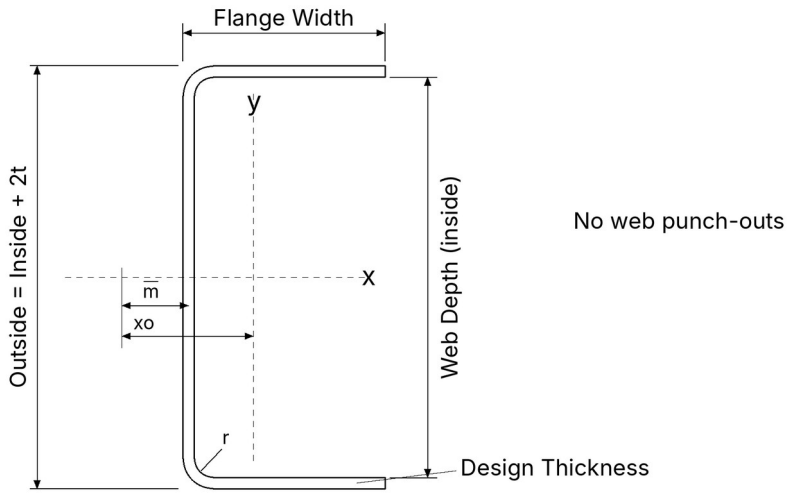


## Profile Properties:

| | | | |
|---|---|---|---|
| Web Depth (inside) | 12.000 in | Yield Strength Fy: | 50 ksi |
| Flange Width | 1.625 in | Unit Weight | 2.33 lb/ft |
| Web Depth (outside) | 12.0902 in | Punchout Width / Length | None |
| Design Thickness | 0.0451 in | Coating | G60 or G90 |
| Thickness | 43 mils (18 Ga) | Min. Steel Thickness | 0.0428 in |
| Inside Bend Radius | 0.0712 in | Tensile Strength Fu | 65 ksi |

## Gross Section Properties:

| | | |
|---|---|---|
| Cross Sectional Area | Agross | 0.6841 in2 |
| Member weight per foot of length | | 2.33 lb/ft |
| Moment of Inertia. x-axis | Ix | 11.6833 in4 |
| Section Modulus. x-axis | Sx | 1.9327 in3 |
| Radius of Gyration. x-axis | rx | 4.1324 in |
| Moment of Inertia. y-axis | Iy | 0.1041 in4 |
| Radius of Gyration. y-axis | ry | 0.3901 in |

## Torsional Properties:

| | | |
|---|---|---|
| St. Venant Torsion Constant | J x 1000 | 0.4639 in4 |
| Warping Constant | Cw | 2.9935 in6 |
| Distance Between Shear Axis and Neutral Axis | x0 | -0.5250 in |
| Shear Center to Web Centerline | m | 0.3557 in |
| Polar Radius of Gyration | r0 | 4.1839 in |
| Torsional Flexural Constant | β | 0.9843 |
| Limit of Unbraced Length | Lu | 14.29 in |

## Effective Section Properties:

| | | |
|---|---|---|
| Effective Area | Aeff | 0.1591 in2 |
| Effective Moment of Inertia for Deflection | Ixe | 6.9316 in4 |
| Effective Section Modulus | Sxe | 0.8664 in3 |
| Allowable Bending Moment | Ma | 25.9412 in.k |
| Allowable Shear Force | Vag | 688 lbs |

## Codes & Standards:

- Calculations are based on AISI S240-20 and AISI S100-16 (2020) w/S2-20.
- AISI S240-20 North American Standard for Cold-Formed Steel Structural Framing: Section A3 Material (ASTM A1003/A1003M); Section A4 Corrosion Protection (ASTM A653/A653M); Section A5 Products – thickness, shapes, tolerances, identification; Section C Installation (ASTM C1007).
- IBC 2024 International Building Code. ASTM C955. ASTM A1003. ASTM A653 SS Grade 50 Class 1. Coating G60 or G90 per AISI S240 Section A4.
- ICC-ES ESR-5905 UMS Joists, UMS Studs and UMS Tracks.
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869
- Note: Tracks are manufactured without web punch-outs. Web depth designation is the inside-to-inside dimension; outside web depth = designation + 2 × design thickness (tolerance 0 to +1/8''). Web h/t exceeds 260: bearing (at supports and concentrated loads) and intermediate stiffeners are required per AISI S100-16 w/S2-20 Section B4 and Table B4.1-1.

*Structural Track. The technical content of this literature is effective 10/30/2026 and supersedes all previous information.*