PRODUCT SUBMITTAL SHEET

Product Type: Structural Track

Product Definition: 1200T200-54 (50ksi)

CSI Code: 05 41 00

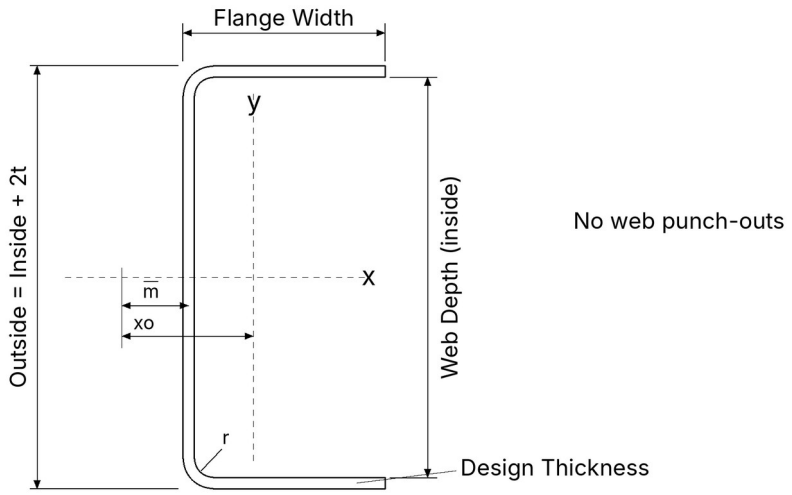

No web punch-outs

Profile Properties:

Web Depth (inside)	12.000 in	Yield Strength Fy:	50 ksi
Flange Width	2.000 in	Unit Weight	3.06 lb/ft
Web Depth (outside)	12.1132 in	Punchout Width / Length	None
Design Thickness	0.0566 in	Coating	G60 or G90
Thickness	54 mils (16 Ga)	Min. Steel Thickness	0.0538 in
Inside Bend Radius	0.0849 in	Tensile Strength Fu	65 ksi

Gross Section Properties:

Cross Sectional Area	Agross	0.9001 in2
Member weight per foot of length		3.06 lb/ft
Moment of Inertia. x-axis	Ix	16.1825 in4
Section Modulus. x-axis	Sx	2.6719 in3
Radius of Gyration. x-axis	rx	4.2401 in
Moment of Inertia. y-axis	Iy	0.2354 in4
Radius of Gyration. y-axis	ry	0.5114 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0.9612 in4
Warping Constant	Cw	6.6066 in6
Distance Between Shear Axis and Neutral Axis	x0	-0.7328 in
Shear Center to Web Centerline	m	0.4883 in
Polar Radius of Gyration	r0	4.3333 in
Torsional Flexural Constant	β	0.9714
Limit of Unbraced Length	Lu	18.75 in

Effective Section Properties:

Effective Area	Aeff	0.2481 in2
Effective Moment of Inertia for Deflection	Ixe	10.3990 in4
Effective Section Modulus	Sxe	1.3400 in3
Allowable Bending Moment	Ma	40.1187 in.k
Allowable Shear Force	Vag	1364 lbs

Codes & Standards:

- Calculations are based on AISI S240-20 and AISI S100-16 (2020) w/S2-20.
- AISI S240-20 North American Standard for Cold-Formed Steel Structural Framing: Section A3 Material (ASTM A1003/A1003M); Section A4 Corrosion Protection (ASTM A653/A653M); Section A5 Products – thickness, shapes, tolerances, identification; Section C Installation (ASTM C1007).
- IBC 2024 International Building Code. ASTM C955. ASTM A1003. ASTM A653 SS Grade 50 Class 1. Coating G60 or G90 per AISI S240 Section A4.
- ICC-ES ESR-5905 UMS Joists, UMS Studs and UMS Tracks.
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869
- Note: Tracks are manufactured without web punch-outs. Web depth designation is the inside-to-inside dimension; outside web depth = designation + 2 × design thickness (tolerance 0 to +1/8''). Web h/t exceeds 200: bearing stiffeners are required at all supports and concentrated loads per AISI S100-16 w/S2-20 Section B4 and Table B4.1-1.

Structural Track. The technical content of this literature is effective 10/30/2026 and supersedes all previous information.