
PRODUCT SUBMITTAL SHEET

Product Type: Structural Stud

Product Definition: 1200S250-54-U (50ksi, Unpunched)

CSI Code: 05 41 00

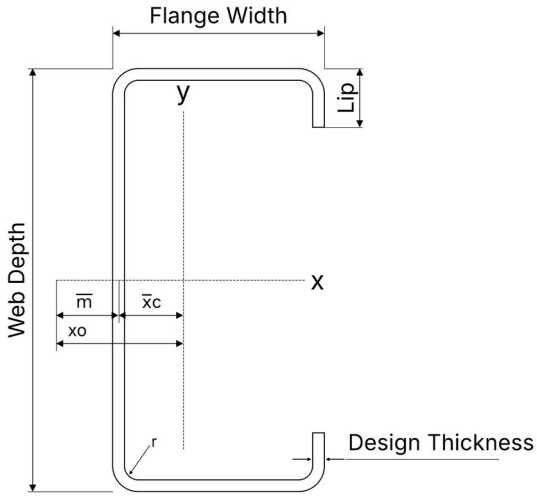

Profile Properties:

Web Depth	12.000 in	Yield Strength Fy:	50 ksi
Flange Width	2.500 in	Unit Weight	3.43 lb/ft
Stiffening Lip	0.6250 in	Punchout Width / Length	None (unpunched)
Design Thickness	0.0566 in	Coating	G60 or G90
Thickness	54 mils (16 Ga)	Min. Steel Thickness	0.0538 in
Inside Bend Radius	0.0849 in	Tensile Strength Fu	65 ksi

Gross Section Properties:

Cross Sectional Area	Agross	1.0091 in2
Member weight per foot of length		3.43 lb/ft
Moment of Inertia. x-axis	Ix	19.6867 in4
Section Modulus. x-axis	Sx	3.2811 in3
Radius of Gyration. x-axis	rx	4.4168 in
Moment of Inertia. y-axis	Iy	0.6829 in4
Radius of Gyration. y-axis	ry	0.8226 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	1.0776 in4
Warping Constant	Cw	19.5054 in6
Distance Between Shear Axis and Neutral Axis	x0	-1.3775 in
Shear Center to Web Centerline	m	0.8925 in
Polar Radius of Gyration	r0	4.6992 in
Torsional Flexural Constant	β	0.9141
Limit of Unbraced Length	Lu	38.38 in

Effective Section Properties:

Effective Area	Aeff	0.3944 in2
Effective Moment of Inertia for Deflection	Ixe	15.3832 in4
Effective Section Modulus	Sxe	2.1490 in3
Allowable Bending Moment	Ma	64.3419 in.k
Allowable Moment (Distortional Buckling)	Mad	58.4081 in.k
Allowable Shear Force (Solid Section)	Vag	1377 lbs

Codes & Standards:

- Calculations are based on AISI S240-20 and AISI S100-16 (2020) w/S2-20.
- AISI S240-20 North American Standard for Cold-Formed Steel Structural Framing: Section A3 Material (ASTM A1003/A1003M); Section A4 Corrosion Protection (ASTM A653/A653M); Section A5 Products – thickness, shapes, tolerances, identification; Section C Installation (ASTM C1007).
- IBC 2024 International Building Code. ASTM C955. ASTM A1003. ASTM A653 SS Grade 50 Class 1. Coating G60 or G90 per AISI S240 Section A4.
- ICC-ES ESR-5905 UMS Joists, UMS Studs and UMS Tracks.
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869
- Note: Supplied without web punch-outs; holes or punch-outs in the web are outside the scope of ESR-5905 for members with h/t > 200. Web h/t exceeds 200: bearing stiffeners are required at all supports and concentrated loads per AISI S100-16 w/S2-20 Section B4 and Table B4.1-1.

Structural Studs. The technical content of this literature is effective 10/30/2026 and supersedes all previous information.