PRODUCT SUBMITTAL SHEET

Product Type: Structural Track

Product Definition: 1200T250-54 (33ksi)

CSI Code: 05 41 00

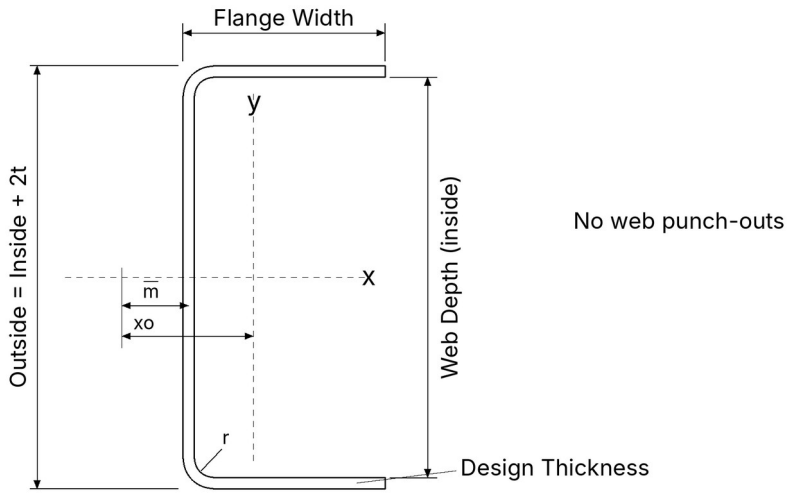

No web punch-outs

Profile Properties:

Web Depth (inside)	12.000 in	Yield Strength Fy:	33 ksi
Flange Width	2.500 in	Unit Weight	3.26 lb/ft
Web Depth (outside)	12.1132 in	Punchout Width / Length	None
Design Thickness	0.0566 in	Coating	G60 or G90
Thickness	54 mils (16 Ga)	Min. Steel Thickness	0.0538 in
Inside Bend Radius	0.0849 in	Tensile Strength Fu	45 ksi

Gross Section Properties:

Cross Sectional Area	Agross	0.9567 in2
Member weight per foot of length		3.26 lb/ft
Moment of Inertia. x-axis	Ix	18.2393 in4
Section Modulus. x-axis	Sx	3.0115 in3
Radius of Gyration. x-axis	rx	4.3663 in
Moment of Inertia. y-axis	Iy	0.4447 in4
Radius of Gyration. y-axis	ry	0.6818 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	1.0216 in4
Warping Constant	Cw	12.1404 in6
Distance Between Shear Axis and Neutral Axis	x0	-1.0432 in
Shear Center to Web Centerline	m	0.6817 in
Polar Radius of Gyration	r0	4.5407 in
Torsional Flexural Constant	β	0.9472
Limit of Unbraced Length	Lu	30.07 in

Effective Section Properties:

Effective Area	Aeff	0.2990 in2
Effective Moment of Inertia for Deflection	Ixe	12.2054 in4
Effective Section Modulus	Sxe	1.6046 in3
Allowable Bending Moment	Ma	31.7072 in.k
Allowable Shear Force	Vag	1364 lbs

Codes & Standards:

- Calculations are based on AISI S240-20 and AISI S100-16 (2020) w/S2-20.
- AISI S240-20 North American Standard for Cold-Formed Steel Structural Framing: Section A3 Material (ASTM A1003/A1003M); Section A4 Corrosion Protection (ASTM A653/A653M); Section A5 Products – thickness, shapes, tolerances, identification; Section C Installation (ASTM C1007).
- IBC 2024 International Building Code. ASTM C955. ASTM A1003. ASTM A653 SS Grade 33. Coating G60 or G90 per AISI S240 Section A4.
- ICC-ES ESR-5905 UMS Joists, UMS Studs and UMS Tracks.
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869
- Note: Tracks are manufactured without web punch-outs. Web depth designation is the inside-to-inside dimension; outside web depth = designation + 2 × design thickness (tolerance 0 to +1/8''). Web h/t exceeds 200: bearing stiffeners are required at all supports and concentrated loads per AISI S100-16 w/S2-20 Section B4 and Table B4.1-1.

Structural Track. The technical content of this literature is effective 10/30/2026 and supersedes all previous information.