
PRODUCT SUBMITTAL SHEET

Product Type: Structural Stud

Product Definition: 1000S162-33-U (50ksi, Unpunched)

CSI Code: 05 41 00

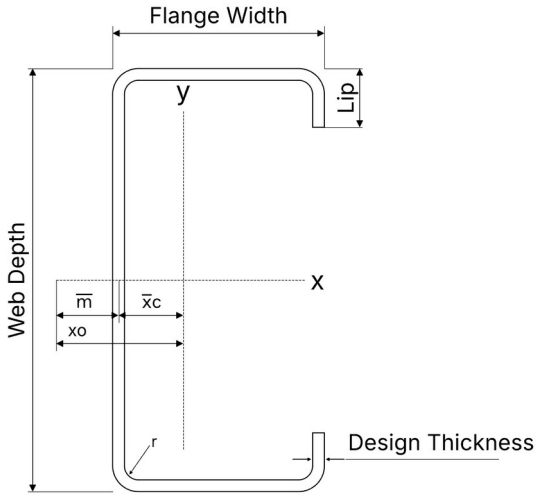

Profile Properties:

Web Depth	10.000 in	Yield Strength Fy:	50 ksi
Flange Width	1.625 in	Unit Weight	1.64 lb/ft
Stiffening Lip	0.5000 in	Punchout Width / Length	None (unpunched)
Design Thickness	0.0346 in	Coating	G60 or G90
Thickness	33 mils (20 Ga)	Min. Steel Thickness	0.0329 in
Inside Bend Radius	0.0764 in	Tensile Strength Fu	65 ksi

Gross Section Properties:

Cross Sectional Area	Agross	0.4827 in2
Member weight per foot of length		1.64 lb/ft
Moment of Inertia. x-axis	Ix	6.2006 in4
Section Modulus. x-axis	Sx	1.2401 in3
Radius of Gyration. x-axis	rx	3.5841 in
Moment of Inertia. y-axis	Iy	0.1317 in4
Radius of Gyration. y-axis	ry	0.5223 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0.1926 in4
Warping Constant	Cw	2.6919 in6
Distance Between Shear Axis and Neutral Axis	x0	-0.8325 in
Shear Center to Web Centerline	m	0.5503 in
Polar Radius of Gyration	r0	3.7164 in
Torsional Flexural Constant	β	0.9498
Limit of Unbraced Length	Lu	26.61 in

Effective Section Properties:

Effective Area	Aeff	0.1700 in2
Effective Moment of Inertia for Deflection	Ixe	4.7174 in4
Effective Section Modulus	Sxe	0.7757 in3
Allowable Bending Moment	Ma	23.2258 in.k
Allowable Moment (Distortional Buckling)	Mad	19.4794 in.k
Allowable Shear Force (Solid Section)	Vag	377 lbs

Codes & Standards:

- Calculations are based on AISI S240-20 and AISI S100-16 (2020) w/S2-20.
- AISI S240-20 North American Standard for Cold-Formed Steel Structural Framing: Section A3 Material (ASTM A1003/A1003M); Section A4 Corrosion Protection (ASTM A653/A653M); Section A5 Products – thickness, shapes, tolerances, identification; Section C Installation (ASTM C1007).
- IBC 2024 International Building Code. ASTM C955. ASTM A1003. ASTM A653 SS Grade 50 Class 1. Coating G60 or G90 per AISI S240 Section A4.
- ICC-ES ESR-5905 UMS Joists, UMS Studs and UMS Tracks.
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869
- Note: Supplied without web punch-outs; holes or punch-outs in the web are outside the scope of ESR-5905 for members with h/t > 200. Web h/t exceeds 260: bearing (at supports and concentrated loads) and intermediate stiffeners are required per AISI S100-16 w/S2-20 Section B4 and Table B4.1-1.

Structural Studs. The technical content of this literature is effective 10/30/2026 and supersedes all previous information.