
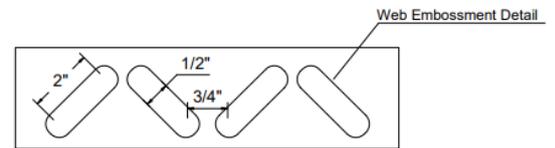
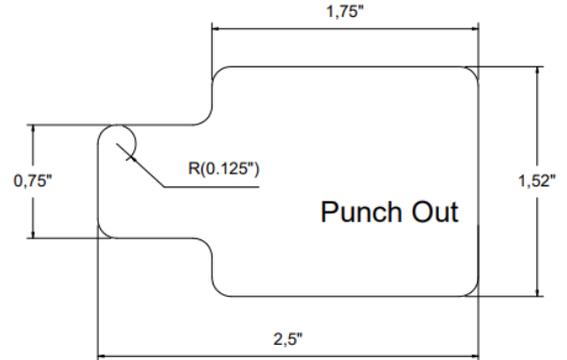


Product Type: Drywall Stud
Product Definition: 400S125-15 25EQ
CSI Code: 09.22.16.13

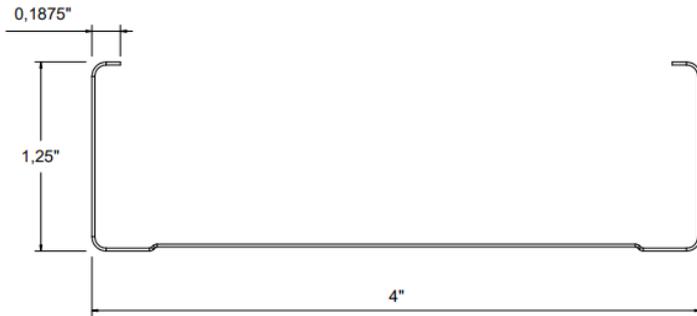

Embossments in web are only placed on sections 2-1/2" and wider.

Profile Properties:

Web Depth 4,000 in
 Flange Width 1,250 in
 Stiffening Lip 0,1875 in
 Design Thickness 0,0153 in
 Minimum Thickness 0,0145 in

Yield Strength: 50 ksi
 Unit Weight 0,34 lb/ft
 Punchout Width / Length Please see figure
 Finish G40
 Color Coding

Gross Section Properties:

Cross Sectional Area	Agross	0,1003 in ²
Moment of Inertia, x-axis	Ix	0,2375 in ⁴
Radius of Gyration, x-axis	rx	1,5390 in
Moment of Inertia, y-axis	Iy	0,0167 in ⁴
Radius of Gyration, y-axis	ry	0,4083 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0,0075 in ⁴
Warping Constant	Cw	0,0504 in ⁶
Distance Between Shear Axis and Neutral Axis	x0	-0,7221 in
Polar Radius of Gyration	r0	1,7483 in
Torsional Flexural Constant	β	0,8294
Limit of Unbraced Length	Lu	31,16 in

Effective Section Properties:

Effective Area	Aeff	0,0810 in ²
Effective Moment of Inertia for Deflection	Ixe	0,1934 in ⁴
Effective Section Modulus	Sxe	0,0844 in ³
Allowable Bending Moment	Ma	2,1186 in.k
Allowable Shear Force	Vag	80 lbs

Codes & Standards:

- Calculations are based on AISI S220-20 and AISI S100-16.
- Complies with IBC2021, ASTM C645, ASTM C754, ASTM A653, ASTM A1003, ASTM E72
- Intertek Certificate of Compliance No: COC-WHI23-37729201
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869

Limiting Heights, Non Composite (ft-in):

Profile	5 psf			7,5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	17' 1"	13' 7"	11' 10"	14' 11"	11' 10"	10' 4"	13' 7"	10' 9"	9' 5"
16	15' 6"	12' 4"	10' 9"	13' 7"	10' 9"	9' 5"	12' 0"	9' 9"	8' 6"
24	13' 7"	10' 9"	9' 5"	10' 8"	9' 5"	8' 3"	8' 0"	8' 0"	7' 6"

- Heights are based on AISI S220-20 and AISI S100-16, using steel properties alone.
- Above listed Non-Composite Limiting Heights are applicable when the unbraced length is less than or equal to Lu. Heights are limited by moment, deflection and shear.

Limiting Heights, Composite – Fully Braced (ft-in):

Profile	5 psf			7,5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	22' 8"	18' 0"	15' 9"	19' 1"	15' 9"	13' 9"	16' 6"	14' 4"	12' 6"
16	20' 3"	16' 4"	14' 4"	16' 6"	14' 4"	12' 6"	14' 4"	13' 0"	11' 3"
24	16' 6"	14' 4"	12' 6"	13' 6"	12' 6"	10' 8"	11' 8"	11' 3"	9' 6"

- The composite limiting heights are taken from ASTM C754-20 and based on a single layer of 5/8" Type X gypsum board to each stud flange.
- The gypsum board must be applied full height in the vertical orientation in accordance with ASTM C754 using minimum No. 6 Type S Drywall screws.
- Screws shall be spaced a maximum of 16 in on-center to framing members (including top & bottom track] spaced at 16 in or 12 in on-center.
- Screws shall be spaced a maximum of 12 in on-center to framing members (including top & bottom track] spaced at 24 in on-center.
- No fasteners are required for attaching the stud to the track except as detailed in ASTM C754.
- Stud end bearing must be a minimum of 1 inch.