


Product Type: Drywall Track
Product Definition: 600T125-33 33ksi
CSI Code: 09.22.16.13

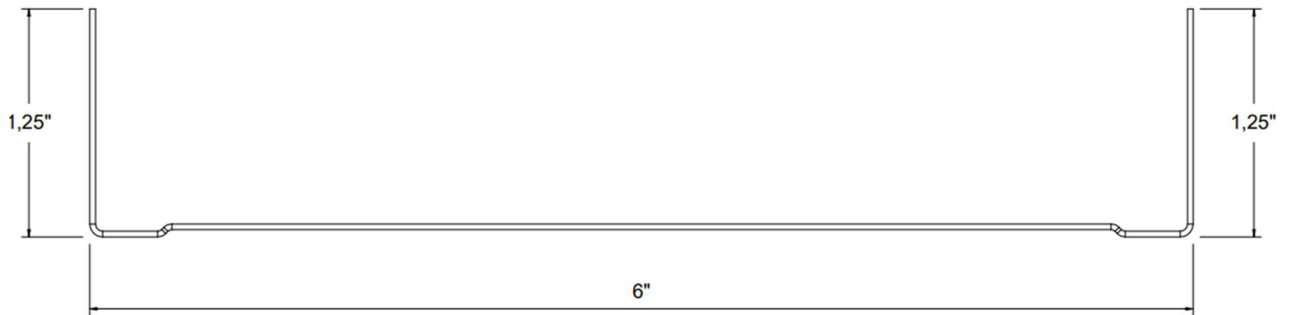

Profile Properties:

Web Depth	6,000 in	Yield Strength:	33 ksi
Flange Width	1,250 in	Unit Weight	0,98 lb/ft
Design Thickness	0,0346 in	Finish	G40
Minimum Thickness	0,0329 in	Color Coding	White

Gross Section Properties:

Cross Sectional Area	Agross	0,2940 in ²
Moment of Inertia, x-axis	Ix	1,3463 in ⁴
Radius of Gyration, x-axis	rx	2,1585 in
Moment of Inertia, y-axis	Iy	0,0336 in ⁴
Radius of Gyration, y-axis	ry	0,3411 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0,1153 in ⁴
Warping Constant	Cw	0,2066 in ⁶
Distance Between Shear Axis and Neutral Axis	x0	-0,5164 in
Polar Radius of Gyration	r0	2,2455 in
Torsional Flexural Constant	β	0,9471
Limit of Unbraced Length	Lu	27,55 in





Effective Section Properties:

Effective Area	A _{eff}	0,2466 in ²
Effective Moment of Inertia for Deflection	I _{xe}	1,1226 in ⁴
Effective Section Modulus	S _{xe}	0,3380 in ³
Allowable Bending Moment	M _a	5,7835 in.K
Allowable Shear Force	V _{ag}	658 lbs

Codes & Standards:

- Calculations are based on AISI S220-20 and AISI S100-16.
- Complies with IBC2021, ASTM C645, ASTM C754, ASTM A653, ASTM A1003, ASTM E72
- Intertek Certificate of Compliance No: COC-WHI23-37729201
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869

