


Product Type: Drywall Track

Product Definition: 162T125-15 25EQ

CSI Code: 09.22.16.13

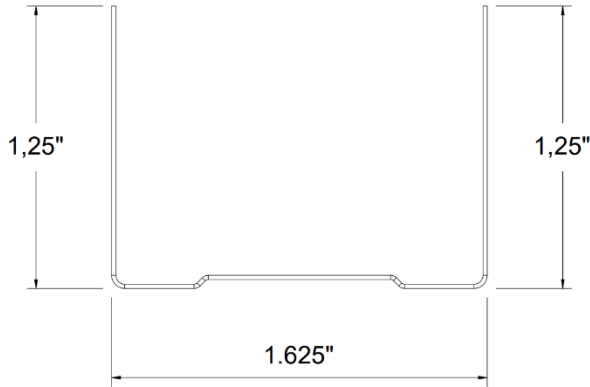

Profile Properties:

Web Depth	1,625 in	Yield Strength:	50 ksi
Flange Width	1,250 in	Unit Weight	0,21 lb/ft
Design Thickness	0,0153 in	Finish	G40
Minimum Thickness	0,0145 in	Color Coding	None

Gross Section Properties:

Cross Sectional Area	Agross	0,0610 in ²
Moment of Inertia, x-axis	Ix	0,0297 in ⁴
Radius of Gyration, x-axis	rx	0,0,6983 in
Moment of Inertia, y-axis	Iy	0,0100 in ⁴
Radius of Gyration, y-axis	ry	0,4048 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0,0046 in ⁴
Warping Constant	Cw	0,0048 in ⁶
Distance Between Shear Axis and Neutral Axis	x0	-0,8644 in
Polar Radius of Gyration	r0	1,1827 in
Torsional Flexural Constant	β	0,4658
Limit of Unbraced Length	Lu	30,89 in



Effective Section Properties:

Effective Area	Aeff	0,0481 in ²
Effective Moment of Inertia for Deflection	Ixe	0,0188 in ⁴
Effective Section Modulus	Sxe	0,0180 in ³
Allowable Bending Moment	Ma	0,4703 in.K
Allowable Shear Force	Vag	200 lbs

Codes & Standards:

- Calculations are based on AISI S220-20 and AISI S100-16.
- Complies with IBC2021, ASTM C645, ASTM C754, ASTM A653, ASTM A1003, ASTM E72
- Intertek Certificate of Compliance No: COC-WHI23-37729201
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869