PRODUCT SUBMITTAL SHEET

Product Type: Structural Track

Product Definition: 1000T125-33 (33ksi)

CSI Code: 05 41 00

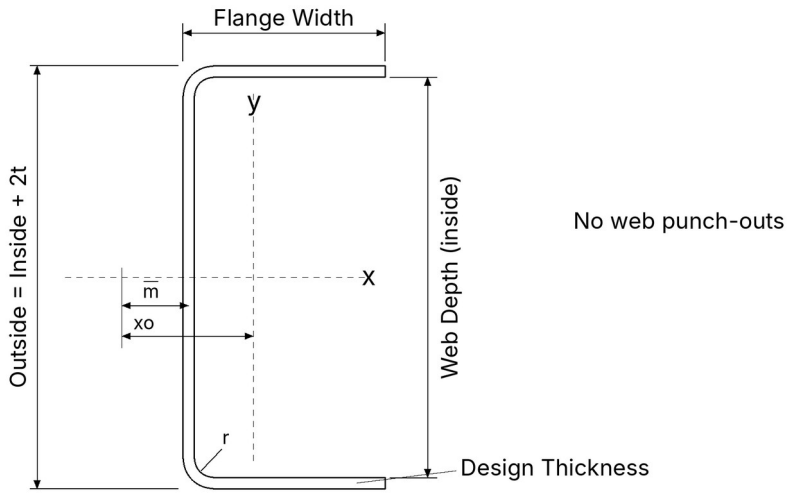

No web punch-outs

Profile Properties:

Web Depth (inside)	10.000 in	Yield Strength Fy:	33 ksi
Flange Width	1.250 in	Unit Weight	1.46 lb/ft
Web Depth (outside)	10.0692 in	Punchout Width / Length	None
Design Thickness	0.0346 in	Coating	G60 or G90
Thickness	33 mils (20 Ga)	Min. Steel Thickness	0.0329 in
Inside Bend Radius	0.0764 in	Tensile Strength Fu	45 ksi

Gross Section Properties:

Cross Sectional Area	Agross	0.4297 in2
Member weight per foot of length		1.46 lb/ft
Moment of Inertia. x-axis	Ix	4.9924 in4
Section Modulus. x-axis	Sx	0.9916 in3
Radius of Gyration. x-axis	rx	3.4085 in
Moment of Inertia. y-axis	Iy	0.0368 in4
Radius of Gyration. y-axis	ry	0.2925 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0.1715 in4
Warping Constant	Cw	0.7415 in6
Distance Between Shear Axis and Neutral Axis	x0	-0.3840 in
Shear Center to Web Centerline	m	0.2615 in
Polar Radius of Gyration	r0	3.4425 in
Torsional Flexural Constant	β	0.9876
Limit of Unbraced Length	Lu	14.65 in

Effective Section Properties:

Effective Area	Aeff	0.1143 in2
Effective Moment of Inertia for Deflection	Ixe	3.2774 in4
Effective Section Modulus	Sxe	0.5119 in3
Allowable Bending Moment	Ma	10.1147 in.k
Allowable Shear Force	Vag	374 lbs

Codes & Standards:

- Calculations are based on AISI S240-20 and AISI S100-16 (2020) w/S2-20.
- AISI S240-20 North American Standard for Cold-Formed Steel Structural Framing: Section A3 Material (ASTM A1003/A1003M); Section A4 Corrosion Protection (ASTM A653/A653M); Section A5 Products – thickness, shapes, tolerances, identification; Section C Installation (ASTM C1007).
- IBC 2024 International Building Code. ASTM C955. ASTM A1003. ASTM A653 SS Grade 33. Coating G60 or G90 per AISI S240 Section A4.
- ICC-ES ESR-5905 UMS Joists, UMS Studs and UMS Tracks.
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869
- Note: Tracks are manufactured without web punch-outs. Web depth designation is the inside-to-inside dimension; outside web depth = designation + 2 × design thickness (tolerance 0 to +1/8''). Web h/t exceeds 260: bearing (at supports and concentrated loads) and intermediate stiffeners are required per AISI S100-16 w/S2-20 Section B4 and Table B4.1-1.

Structural Track. The technical content of this literature is effective 10/30/2026 and supersedes all previous information.