
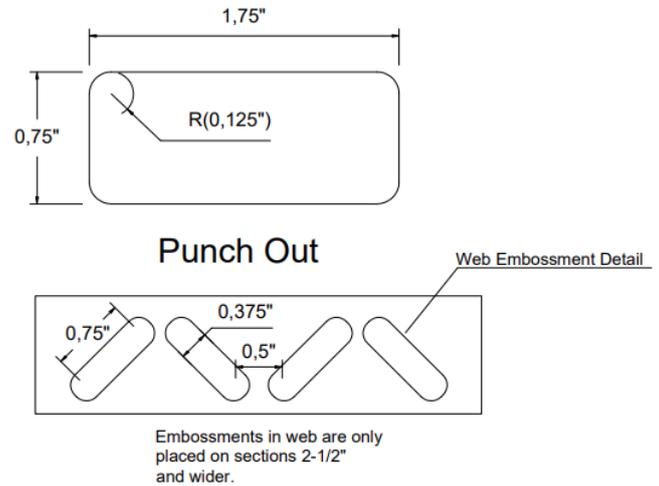


Product Type: Drywall Stud
Product Definition: 250S125-33 33ksi
CSI Code: 09.22.16.13

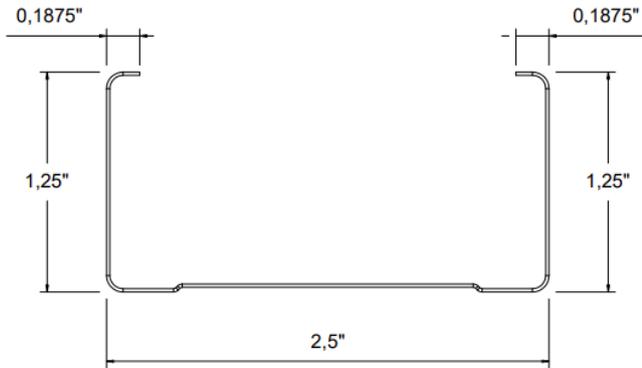

Profile Properties:

Web Depth 2,500 in
 Flange Width 1,250 in
 Stiffening Lip 0,1875 in
 Design Thickness 0,0346 in
 Minimum Thickness 0,0329 in

Yield Strength: 33 ksi
 Unit Weight 0,60 lb/ft
 Punchout Width / Length 0,75 in / 1,75 in
 Finish G40
 Color Coding

Gross Section Properties:

Cross Sectional Area	Agross	0,1772 in ²
Moment of Inertia, x-axis	Ix	0,1800 in ⁴
Radius of Gyration, x-axis	rx	1,0077 in
Moment of Inertia, y-axis	Iy	0,0322 in ⁴
Radius of Gyration, y-axis	ry	0,4260 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0,0707 in ⁴
Warping Constant	Cw	0,0376 in ⁶
Distance Between Shear Axis and Neutral Axis	x0	-0,8520 in
Polar Radius of Gyration	r0	1,3866 in
Torsional Flexural Constant	β	0,6046
Limit of Unbraced Length	Lu	37,78 in

Effective Section Properties:

Effective Area	Aeff	0,1747 in ²
Effective Moment of Inertia for Deflection	Ixe	0,1769 in ⁴
Effective Section Modulus	Sxe	0,1398 in ³
Allowable Bending Moment	Ma	2,5244 in.k
Allowable Shear Force	Vag	972 lbs

Codes & Standards:

- Calculations are based on AISI S220-20 and AISI S100-16.
- Complies with IBC2021, ASTM C645, ASTM C754, ASTM A653, ASTM A1003, ASTM E72
- Intertek Certificate of Compliance No: COC-WHI23-37729201
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869

Limiting Heights, Non Composite (ft-in):

Profile	5 psf			7,5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	16' 9"	13' 3"	11' 7"	14' 6"	11' 7"	10' 2"	12' 8"	10' 6"	9' 2"
16	15' 2"	12' 1"	10' 6"	12' 8"	10' 6"	9' 2"	11' 0"	9' 7"	8' 4"
24	12' 8"	10' 6"	9' 2"	10' 5"	9' 2"	8' 0"	9' 0"	8' 4"	7' 4"

- Heights are based on AISI S220-20 and AISI S100-16, using steel properties alone.
- Above listed Non-Composite Limiting Heights are applicable when the unbraced length is less than or equal to Lu. Heights are limited by moment, deflection and shear.

Limiting Heights, Composite – Fully Braced (ft-in):

Profile	5 psf			7,5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	19' 8"	15' 8"	13' 8"	17' 3"	13' 8"	11' 11"	15' 8"	12' 5"	10' 10"
16	17' 11"	14' 3"	12' 5"	15' 8"	12' 5"	10' 10"	14' 3"	11' 3"	9' 10"
24	15' 8"	12' 5"	10' 10"	13' 8"	10' 10"	9' 5"	12' 4"	9' 10"	8' 4"

- The composite limiting heights are taken from ASTM C754-20 and based on a single layer of 5/8" Type X gypsum board to each stud flange.
- The gypsum board must be applied full height in the vertical orientation in accordance with ASTM C754 using minimum No. 6 Type S Drywall screws.
- Screws shall be spaced a maximum of 16 in on-center to framing members (including top & bottom track] spaced at 16 in or 12 in on-center.
- Screws shall be spaced a maximum of 12 in on-center to framing members (including top & bottom track] spaced at 24 in on-center.
- No fasteners are required for attaching the stud to the track except as detailed in ASTM C754.

Stud end bearing must be a minimum of 1 inch.