


Product Type: Drywall Track

Product Definition: 600T125-30 33ksi

CSI Code: 09.22.16.13

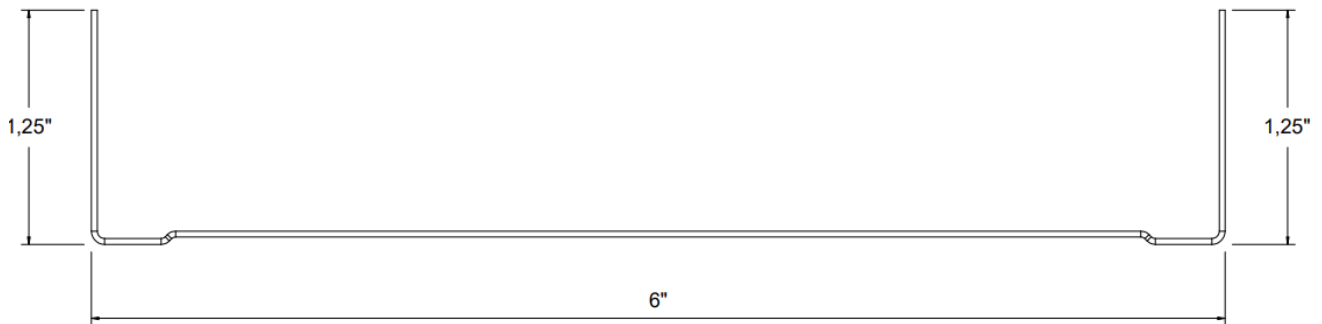

Profile Properties:

Web Depth	6,000 in	Yield Strength:	33 ksi
Flange Width	1,250 in	Unit Weight	0,89 lb/ft
Design Thickness	0,0312 in	Finish	G40
Minimum Thickness	0,0296 in	Color Coding	None

Gross Section Properties:

Cross Sectional Area	Agross	0,2643 in ²
Moment of Inertia, x-axis	Ix	1,2619 in ⁴
Radius of Gyration, x-axis	rx	2,1850 in
Moment of Inertia, y-axis	Iy	0,0284 in ⁴
Radius of Gyration, y-axis	ry	0,3275 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0,0856 in ⁴
Warping Constant	Cw	0,2008 in ⁶
Distance Between Shear Axis and Neutral Axis	x0	-0,486 in
Polar Radius of Gyration	r0	2,2622 in
Torsional Flexural Constant	β	0,9469
Limit of Unbraced Length	Lu	26,3 in



Effective Section Properties:

Effective Area	Aeff	0,2374 in ²
Effective Moment of Inertia for Deflection	Ixe	1,0922 in ⁴
Effective Section Modulus	Sxe	0,3326 in ³
Allowable Bending Moment	Ma	5,4866 in.K
Allowable Shear Force	Vag	471 lbs

Codes & Standards:

- Calculations are based on AISI S220-20 and AISI S100-16.
- Complies with IBC2021, ASTM C645, ASTM C754, ASTM A653, ASTM A1003, ASTM E72
- Intertek Certificate of Compliance No: COC-WHI23-37729201
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869