


Product Type: Drywall Track
Product Definition: 362T125-33 33ksi
CSI Code: 09.22.16.13

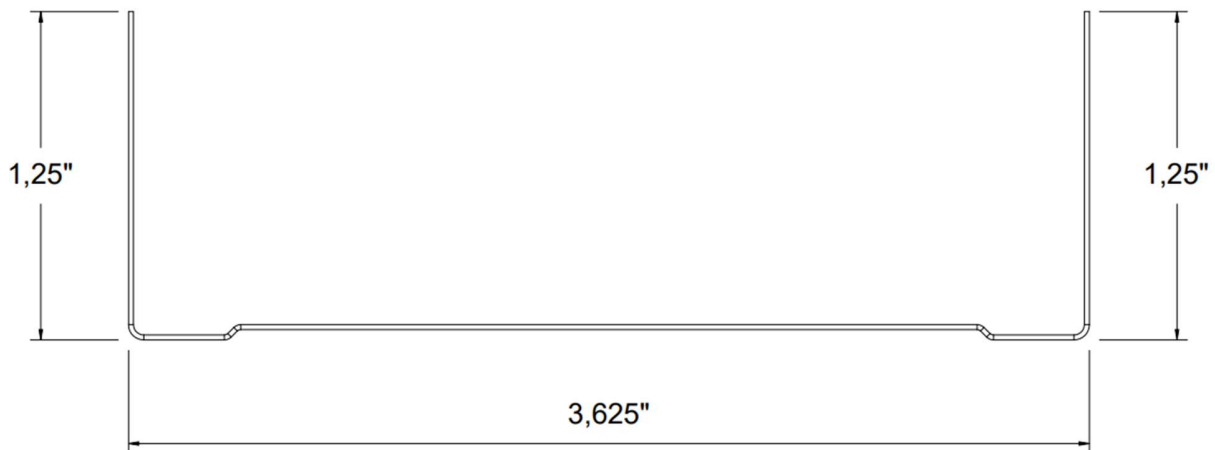

Profile Properties:

Web Depth	3,625 in	Yield Strength:	33 ksi
Flange Width	1,250 in	Unit Weight	0,70 lb/ft
Design Thickness	0,0346 in	Finish	G40
Minimum Thickness	0,0329 in	Color Coding	White

Gross Section Properties:

Cross Sectional Area	Agross	0,2110 in ²
Moment of Inertia, x-axis	Ix	0,3994 in ⁴
Radius of Gyration, x-axis	rx	1,3897 in
Moment of Inertia, y-axis	Iy	0,0298 in ⁴
Radius of Gyration, y-axis	ry	0,3797 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0,0825 in ⁴
Warping Constant	Cw	0,0633 in ⁶
Distance Between Shear Axis and Neutral Axis	x0	-0,6617 in
Polar Radius of Gyration	r0	1,5853 in
Torsional Flexural Constant	β	0,8258
Limit of Unbraced Length	Lu	34,87 in





Effective Section Properties:

Effective Area	A _{eff}	0,1899 in ²
Effective Moment of Inertia for Deflection	I _{xe}	0,3960 in ⁴
Effective Section Modulus	S _{xe}	0,1746 in ³
Allowable Bending Moment	M _a	3,3300 in.K
Allowable Shear Force	V _{ag}	1046 lbs

Codes & Standards:

- Calculations are based on AISI S220-20 and AISI S100-16.
- Complies with IBC2021, ASTM C645, ASTM C754, ASTM A653, ASTM A1003, ASTM E72
- Intertek Certificate of Compliance No: COC-WHI23-37729201
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869

