
PRODUCT SUBMITTAL SHEET

Product Type: Structural Stud

Product Definition: 600S200-43-P (50ksi, Punched)

CSI Code: 05 41 00

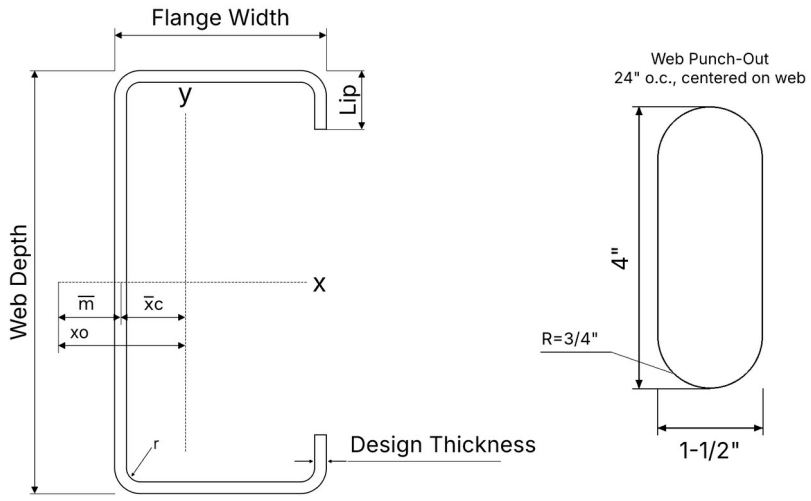

Profile Properties:

Web Depth	6.000 in	Yield Strength Fy:	50 ksi
Flange Width	2.000 in	Unit Weight	1.67 lb/ft
Stiffening Lip	0.6250 in	Punchout Width / Length	1-1/2'' – 4''
Design Thickness	0.0451 in	Coating	G60 or G90
Thickness	43 mils (18 Ga)	Min. Steel Thickness	0.0428 in
Inside Bend Radius	0.0712 in	Tensile Strength Fu	65 ksi

Gross Section Properties:

Cross Sectional Area	Agross	0.4920 in2
Member weight per foot of length		1.67 lb/ft
Moment of Inertia. x-axis	Ix	2.6833 in4
Section Modulus. x-axis	Sx	0.8944 in3
Radius of Gyration. x-axis	rx	2.3354 in
Moment of Inertia. y-axis	Iy	0.2684 in4
Radius of Gyration. y-axis	ry	0.7386 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	0.3336 in4
Warping Constant	Cw	2.0332 in6
Distance Between Shear Axis and Neutral Axis	x0	-1.4460 in
Shear Center to Web Centerline	m	0.8942 in
Polar Radius of Gyration	r0	2.8444 in
Torsional Flexural Constant	β	0.7416
Limit of Unbraced Length	Lu	40.15 in

Effective Section Properties:

Effective Area	Aeff	0.2776 in2
Effective Moment of Inertia for Deflection	Ixe	2.5171 in4
Effective Section Modulus	Sxe	0.8074 in3
Allowable Bending Moment	Ma	24.1745 in.k
Allowable Moment (Distortional Buckling)	Mad	20.1841 in.k
Allowable Shear Force (Solid Section)	Vag	1415 lbs
Allowable Shear Force (Perforated Section)	VaPO	1240 lbs

Codes & Standards:

- Calculations are based on AISI S240-20 and AISI S100-16 (2020) w/S2-20.
- AISI S240-20 North American Standard for Cold-Formed Steel Structural Framing: Section A3 Material (ASTM A1003/A1003M); Section A4 Corrosion Protection (ASTM A653/A653M); Section A5 Products – thickness, shapes, tolerances, identification; Section C Installation (ASTM C1007).
- IBC 2024 International Building Code. ASTM C955. ASTM A1003. ASTM A653 SS Grade 50 Class 1. Coating G60 or G90 per AISI S240 Section A4.
- ICC-ES ESR-5905 UMS Joists, UMS Studs and UMS Tracks.
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869
- Note: Punch-outs 1-1/2'' × 4'' at 24'' o.c., first punch-out min. 12'' from end. Properties are for the full section away from punch-outs; VaPO accounts for the punch-out.

Structural Studs. The technical content of this literature is effective 10/30/2026 and supersedes all previous information.