


Product Type: Hat Furring Channel
Product Definition: 087F125-43 33ksi
CSI Code: 09.22.16.13

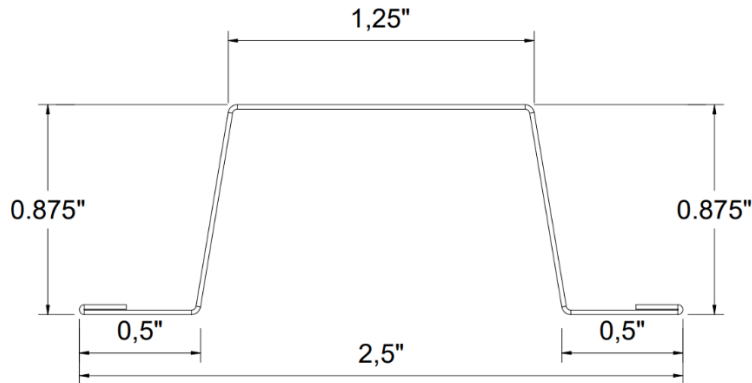

Profile Properties:

Web Depth	0,875 in	Yield Strength:	33 ksi
Flange Width	2,50 in	Cross Sectional Area	0,172 in ²
Design Thickness	0,0452 in	Unit Weight	0,5874 lb/ft
Minimum Thickness	0,0429 in	Finish	G40

Effective Section Properties:

Effective Moment of Inertia for Deflection	I _{xe}	0,022 in ⁴
Allowable Bending Moment	M _a	1,008 in.K

Hat Furring Channel Limiting Ceiling Spans (ft-in):

Load	4 psf			6 psf			13 psf		
Span/Spacing	12"	16"	24"	12"	16"	24"	12"	16"	24"
Single	6'-3"	5'-9"	4'-12"	5'-6"	4'-12"	4'-4"	4'-3"	3'-10"	3'-4"
Multiple	8'-6"	7'-9"	6'-9"	7'-5"	6'-9"	5'-11"	5'-9"	5'-3"	4'-7"

Codes & Standards:

- Calculations are based on AISI S220-20 and AISI S100-16.
- Complies with IBC2021, ASTM C645, ASTM C754, ASTM A653, ASTM A1003, ASTM E72
- Intertek Certificate of Compliance No: COC-WHI23-37729201
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869

Application Areas:

- Furring for walls or ceilings.
- Furring for masonry walls.
- Framing for suspended ceilings.