
PRODUCT SUBMITTAL SHEET

Product Type: Structural Stud

Product Definition: 1200S162-68-P (50ksi, Punched)

CSI Code: 05 41 00

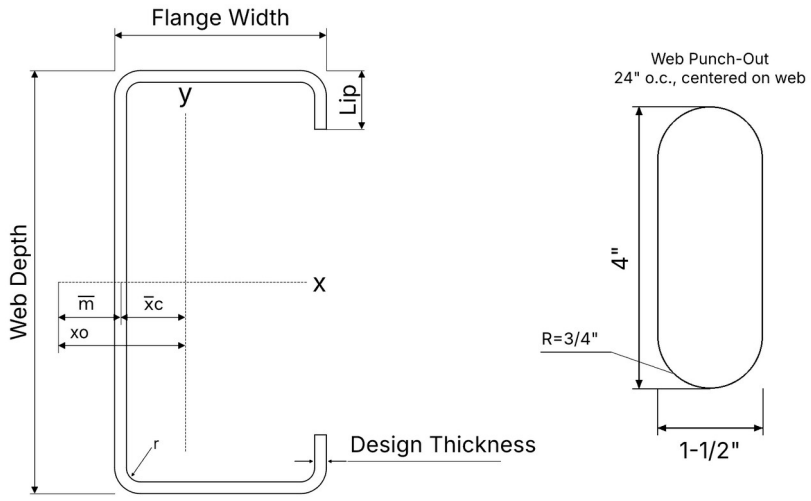

Profile Properties:

Web Depth	12.000 in	Yield Strength Fy:	50 ksi
Flange Width	1.625 in	Unit Weight	3.81 lb/ft
Stiffening Lip	0.5000 in	Punchout Width / Length	1-1/2'' – 4''
Design Thickness	0.0713 in	Coating	G60 or G90
Thickness	68 mils (14 Ga)	Min. Steel Thickness	0.0677 in
Inside Bend Radius	0.1069 in	Tensile Strength Fu	65 ksi

Gross Section Properties:

Cross Sectional Area	Agross	1.1208 in2
Member weight per foot of length		3.81 lb/ft
Moment of Inertia. x-axis	Ix	19.5257 in4
Section Modulus. x-axis	Sx	3.2543 in3
Radius of Gyration. x-axis	rx	4.1738 in
Moment of Inertia. y-axis	Iy	0.2555 in4
Radius of Gyration. y-axis	ry	0.4774 in

Torsional Properties:

St. Venant Torsion Constant	J x 1000	1.8993 in4
Warping Constant	Cw	7.7388 in6
Distance Between Shear Axis and Neutral Axis	x0	-0.7185 in
Shear Center to Web Centerline	m	0.4853 in
Polar Radius of Gyration	r0	4.2620 in
Torsional Flexural Constant	β	0.9716
Limit of Unbraced Length	Lu	30.20 in

Effective Section Properties:

Effective Area	Aeff	0.5108 in2
Effective Moment of Inertia for Deflection	Ixe	17.5045 in4
Effective Section Modulus	Sxe	2.6452 in3
Allowable Bending Moment	Ma	79.1967 in.k
Allowable Moment (Distortional Buckling)	Mad	66.1646 in.k
Allowable Shear Force (Solid Section)	Vag	2770 lbs
Allowable Shear Force (Perforated Section)	VaPO	2770 lbs

Codes & Standards:

- Calculations are based on AISI S240-20 and AISI S100-16 (2020) w/S2-20.
- AISI S240-20 North American Standard for Cold-Formed Steel Structural Framing: Section A3 Material (ASTM A1003/A1003M); Section A4 Corrosion Protection (ASTM A653/A653M); Section A5 Products – thickness, shapes, tolerances, identification; Section C Installation (ASTM C1007).
- IBC 2024 International Building Code. ASTM C955. ASTM A1003. ASTM A653 SS Grade 50 Class 1. Coating G60 or G90 per AISI S240 Section A4.
- ICC-ES ESR-5905 UMS Joists, UMS Studs and UMS Tracks.
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869
- Note: Punch-outs 1-1/2'' × 4'' at 24'' o.c., first punch-out min. 12'' from end. Properties are for the full section away from punch-outs; VaPO accounts for the punch-out.

Structural Studs. The technical content of this literature is effective 10/30/2026 and supersedes all previous information.